

MAXHUB

## The V6 ViewPro Series

MAXHUB Collaboration Display

# The Excellent Way to Collaborate



### Virtually Face-to-Face

Ultra-clear picture quality is guaranteed as the MAXHUB V6 ViewPro Series adapts to varying lighting conditions. Homing in on faces, remote discussions are comparable to meeting face to face.

48MP + 8MP dual-camera

WDR

3X optical zoom

Speaker-tracking


Auto-Framing



### Focused, Noise-Free Meetings

Equipped with 8 array microphones at a 180-degree wide-angle and 12-meter voice pickup range, the MAXHUB V6 ViewPro Series ensures no voice is drowned out.

Automatic gain control   Acoustic echo cancellation   Full duplex   Echo reverberation

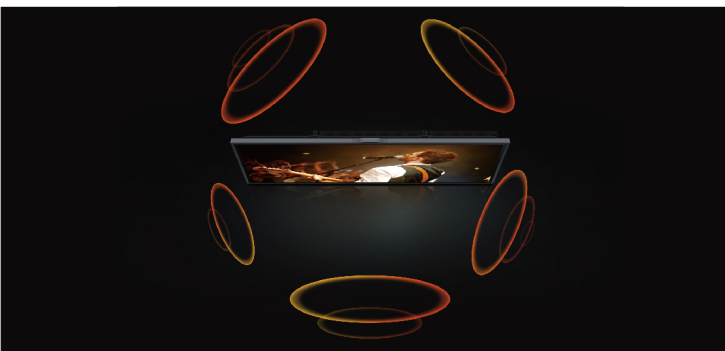

### Immersive Surround Sound

Experience captivating, immersive audio, thanks to its 5 sound units, 40W speakers, side amplification and surround-sound effects.

40W speakers   5 sound units   Side speaker

### Picture-Perfect Performance

4K display

90% NTSC color gamut

△E≤2 high-color accuracy display

Anti-glare tempered glass

Zero parallax



# V6 ViewPro Series

MAXHUB ViewPro series for corporate delivers a superior video conferencing experience and effortless collaboration that creates a more efficient and engaging workplace. Powered by Windows based PC Module, the all-in-one design integrates an intelligent dual-camera, advanced audio processing, interactive whiteboarding, and an intuitive meeting launcher into one complete collaboration display. The powerful combination makes meetings more dynamic and introduces flexible, creative interaction to your organization.



## Professional 4K Display

High Color Accuracy,  $\Delta E \leq 2$   
Wide Color Gamut, NTSC 90%



## Touch Screen

20 Touch Points,  
Minimum Object Recognition - 2mm



## Wireless Screen Sharing

Share your screen through  
MAXHUB Share App



## Built-in Camera

Dual Camera(48MP+8MP)  
3x Optical Zoom  
WDR Technology Supported



## Built-in Microphone

12 meters of voice pick-up  
8 mics arrays, clear conversations



## Built-in Speaker

2.1 Channel  
2x 10W + 20W



## 10th Gen Intel CPU

Powerful performance, fluid experience  
\* With use of MAXHUB PC Module



## Smart Whiteboard

OCR supported,  
Multiple built-in templates

**Display**

Model	V6530	V8630
Diagonal Size(inch)	65	86
Backlight	Direct-lit LED	Direct-lit LED
Panel Technology	VA	VA
Aspect Ratio	16 : 9	16 : 9
Resolution	3840 x 2160	3840 x 2160
Response Time	6.5ms	8ms
Brightness(typ)	350cd/m <sup>2</sup>	350cd/m <sup>2</sup>
Contrast Ratio	5000 : 1	4000 : 1
Viewing Angle	178°/178°	178°/178°
Color Gamut(typ)	90% NTSC	90% NTSC
Display Orientation	Landscape	Landscape
Operating Hour	16/7	16/7

**Dimension&Weight**

Product Dimensions(WxHxD)	1500 x 921 x 88 mm 59.06 x 36.26 x 3.46 inch	1969 x 1184 x 97 mm 77.52 x 46.61 x 3.82 inch
Shipping Dimensions(WxHxD)	1638 x 1005 x 208mm 64.49 x 39.57 x 8.19 inch	2121 x 1304 x 225 mm 83.50 x 51.34 x 8.86 inch
Net Weight(kg /pounds)	37.3 kg / 82.23 pounds	60.6kg / 133.6 pounds
Gross Weight(kg /pounds)	49.0kg / 108 pounds	81.5kg / 179.68 pounds
Wall Mount(VESA)	600 x 400mm / 23.6 x 15.75inch	800 x 600mm / 31.50 x 23.62inch
Screws For VESA	M8 x 25mm / M8 x 0.99inch	M8 x 25mm / M8 x 0.99inch

**POWER**

Power Supply	AC100-240V,50/60Hz	AC100-240V,50/60Hz
Max Power Consumption	350W	450W
Standby	≤0.5W	≤0.5W

**Touch System**

Touch Sensor	IR
Accuracy	± 1mm
Max Touch Points Supported	20
Object Recognition Range	≥2mm
Glass	Zero parallax , 3mm Angi-glare, Antibacterial
Supported Operating System(Touch Return)	Windows10/Windows8/Windows7/WindowsXP/ Android/Linux/Mac OS X/Chrome OS

**Connectivity**

Input	HDMI IN x 1 , USB 2.0 x 1, USB 3.0 x 2, TOUCH 2.0 x 1 , USB Type-C x 2
Audio	Audio out x 1
Control	RS232 x 1
PC Module Slot	Yes, 3840 x 2160@60fps
PC Module	MAXHUB PC Module
Wifi Module	SI06

**Camera/Audio/Microphone**

Built-in Camera	Yes , Dual Camera 48MP(fixed lens)+8MP(with 3x optical zoom)
Camera Features	Auto Frame / Speaker Tracking
Built-in Speakers	2.1 Channel , 10W x 2 + 20W
Microphone Array	8 x Far-field , beam-forming microphone - max 12m range

**Environment**

Operating Temperature	0 C~40 C
Storage Temperature	10%~90%RH
Operating Humidity	-20 C~60 C
Storage Humidity	10%~90%RH

**What's In The Box**

Standard	Power Cord, 1 x Wifi module, 2 x Passive Stylus, 1 x Wall Mount, 1 x Type-C Cable (1.8m   70.9inch)
----------	-----------------------------------------------------------------------------------------------------

**Optional**

wireless dongle



ST41B



ST23C



EST09



EST11