

2-Port 10A Switched PDU with Remote Individual Outlet Control

DESCRIPTION









Elite NPS PDU provides remote manual control of the critical devices by clicking on a few buttons on the smart phone or computer webpage. Stop the problem device by cutting off the power to a specific outlet. By cycling the power off and restarting the device remotely, you save time and money by eliminating the need to send technicians to the root cause of the problem. The PDU has environmental sensor ports that track climate information: temperature and humidity environment variables. The data is available from any web browser and is SNMP-compliant for easy tracking of critical data without the use of any external software.



FEATURES


- Embedded system: Support up to 10/100/1000M Gigabit Ethernet interface.
- Multiple protocols: Support ICMP, ARP, IP, TCP, UDP, DHCP, HTTP, HTTPS, FTP, NTP, SNMP v1/2/3, TLS1.2, IPv4 and IPv6, Telnet, SSHv2
- Management Account Certification: Radius certification support.
- Multi-account management: Multi-group account management system. And provide three-tier permission management.
- IP filtering: Support IP filtering, improve network security mechanisms.
- Power record: Store up to 100000 power and event data.
- Remote firmware upgrade: Provides remote firmware upgrade mechanism.
- System operation message: Send the normal operation of the message automatically by trap.
- Hardware key definition: User-definable button function.
- Temperature unit conversion: Temperature units can choose Celsius or Fahrenheit
- System configuration restore: Support the output of the system settings, to easily deploy a large amount of the same model of PDU.
- Multilingual Support: Support Chinese, English, French, German, Spanish, Russian, Czech, Arabic, Persian.

PRODUCT CODE	DESCRIPTION
RPSWC-10A2	2 Port 10A Switched PDU Remote Individual Outlet Control. Schedule Time Control On/Off/Reboot Event Reaction, Environment Detection, Output 2x 10A IEC C13, 1.8m C13 to C14

Remote Monitor	Ping Event Control	Mail Notification
 <p>Remote monitoring PDU status by web & SNMP</p>	 <p>When the specified IT device does not respond to PING, the output will perform a preset power action.</p>	 <p>Notify specified user by mail & SNMP when outlet action or current over threshold.</p>
Power Sequence	Group Control	Event Reaction
 <p>User-definable power on/off sequence time.</p>	 <p>Set multiple outlets as a single group while controlling the power output.</p>	 <p>Outlet action via pre-set event, including power, environment event and receiving trap from other device.</p>
Schedule Control	Environment Detection	
 <p>Timed & scheduled on/off/reboot control.</p>	 <p>Optional accessory probe to detect temperature and humidity.</p>	

SPECIFICATIONS

Input		Output	
Voltage:	200V~240V AC	Voltage:	200V~240V AC
Frequency:	50/60Hz, full range	Max. Current:	16A
Max. Capacity:	2400VA	Outlet:	(2) C13
Connection:	C14 Detachable Power cord	On/Off Indicator	(2) Green LED @ Front (2) Green LED @ Back
Power Indicator	(1) Red @ Front (1) Red @ Back	Other	
Operation		ENET Connection	(1) RJ45
Operation Temperature:	0°C~50°C	ENV Connection	(1) RJ11
Operation Humidity:	0%~90% RH	Function Selection:	(1) Hole
Storage Temperature:	-20°C~65°C	Signal Indicator	(1) Yellow LED @ Front (1) Yellow LED @ Back
Storage Humidity:	0%~90% RH	Dimension/Weight	
Approval		Net size:	120 x 85 x 58mm
Certification:	CE	Net weight	0.87kg
Warranty:	2 years	Package Size	230 x 175 x 65mm 1kg

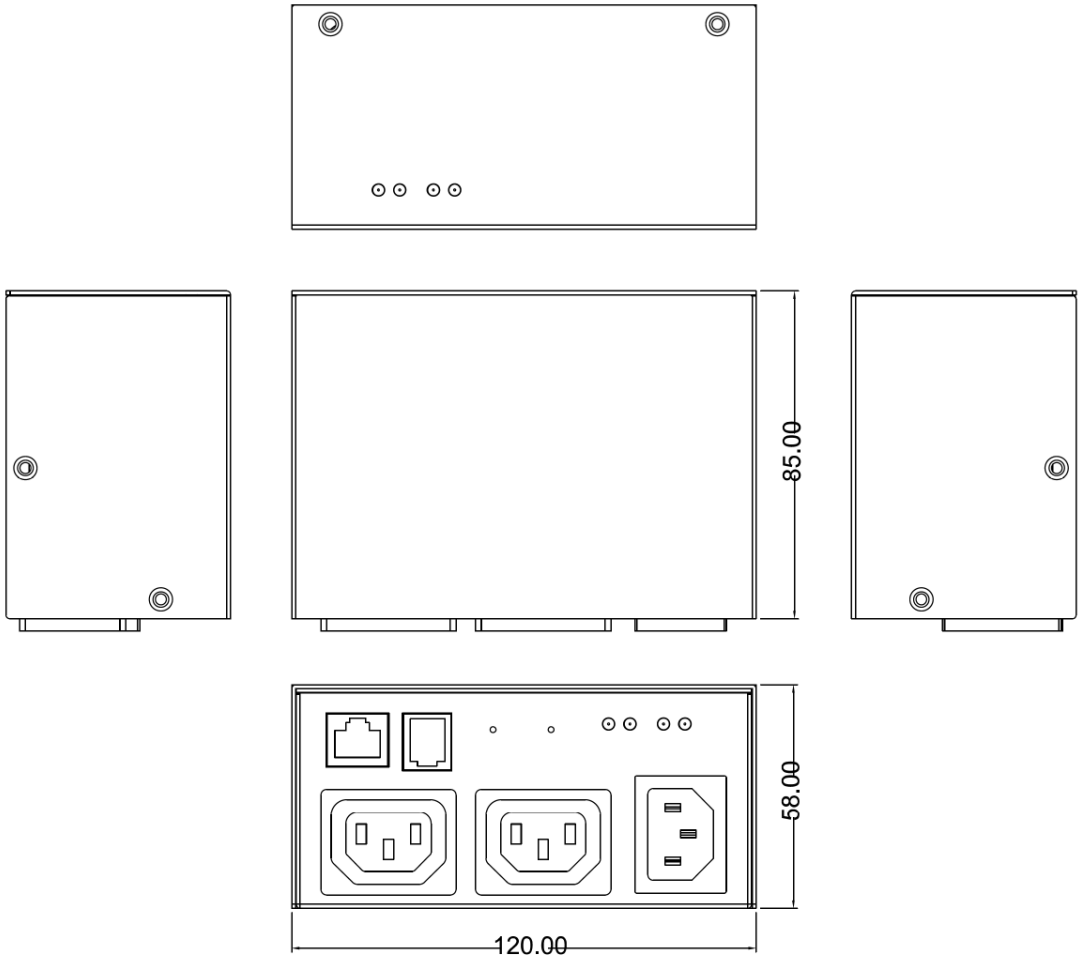

Please note we took the up-most care to compile the information in this datasheet. To the best of our knowledge all info provided were correct at the time of creation. Should any specs change we try to update info accordingly. Information are subject to change without notice. In the case that you find any irregularity please inform our team at contactus@dynamix.co.nz
Last updated: 06 December 2024