

# TRADE\$AVE

## LED Canopy Light

NEW








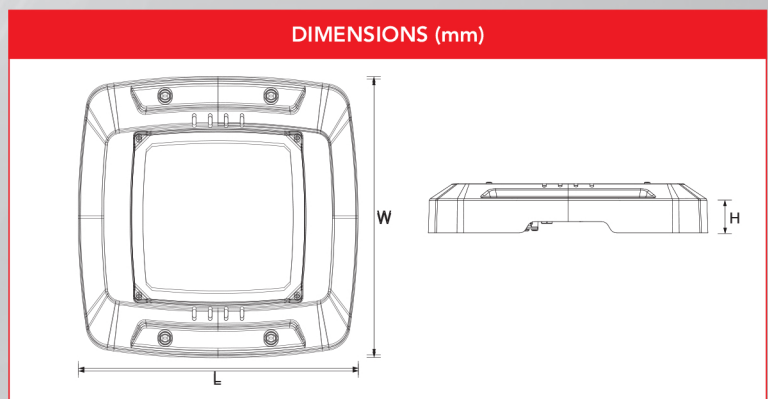
### ■ Features

- ❑ Aluminum housing powder coated white
- ❑ Tempered glass lens and polycarbonate cover
- ❑ Selectable wattage 36-75-100-120W
- ❑ Dip switch function for colour temp change
- ❑ Slim body design
- ❑ Constant current driver
- ❑ Surge protected 6kV Line-Line, 10kV Line-Earth
- ❑ High efficiency SMD chip 150Lm/w
- ❑ Operating temp: -30°C to +50°C
- ❑ IP65 rated at IK08 impact resistance

### ■ Installation Options

- ❑ Plug-in microwave or PIR sensor
- ❑ 501 x 491 x 17mm adaptor plate

<b>CERTIFICATION</b>	<b>IP RATING</b>	<b>NON-DIMMABLE</b>
		
<b>COLOUR TEMP</b>	<b>IK RATING</b>	<b>BOX   CTN QTY</b>
	 1.7kg @ 300mm	<b>1   1</b>



Part No.	Voltage AC	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime hrs	Fitting Colour	Dimensions (L x W x H)mm	Weight
TSTSCP01	200-240V	36-120	0.95	3K-4K-5K	70	5400-11250-15000-18000	120	63,000	White	368 x 368 x 61	2.8kg