


MINI MULTI MODE TIGHT BUFFERED FIBRE CABLE

DESCRIPTION

The DYNAMIX Micro “distribution style” cable is ideal for indoor installations requiring a flexible, lightweight and low cable diameter solution constructed with 250 micron cable and additional Kevlar for strength and protection.

FEATURES

- Sold per meter
- Smaller and lighter than distribution style cable construction
- Flexible cable construction allows for easy handling and management in enclosures
- Low smoke zero halogen emitting jacket-perfectly suited to data centre installations
- Storage and operating temperature: -20°C ~ +60°C
- Min. Bending Radius: 30D (Dynamic), 15D (Static)

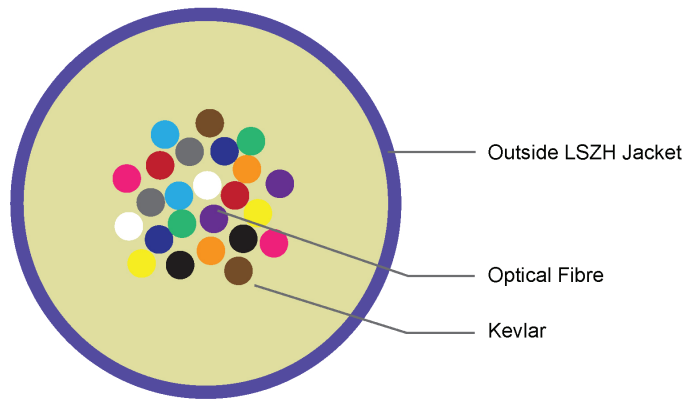

PRODUCT CODES

SOLD PER METER

MODEL CODE	MODE	CORE	DIAMETER
F-TBMINIOM424-M	OM4	24	3.8mm

PROPERTIES

Optical Fibre Type	SM G652	SM G652D	MM 50/125	MM 62.5/125	MM OM3-300
Waveband (nm)	1310/1550		850/1300		
Attenuation (dB/km)	0.5/0.4		3.5/1.5		

Please note we took the up-most care to compile the information in this datasheet. To the best of our knowledge all info provided were correct at the time of creation. Should any specs change we try to update info accordingly. Information are subject to change without notice. In the case that you find any irregularity please inform our team at contactus@dynamix.co.nz

Last updated: 5 April 2023

