

HIKVISION

HiLook



# HiLook

## Intercom Products

# CONTENTS

- 02 Product Family– Hilook Intercom Kit
- 03 IP Intercom Kit
- 04 2-Wire Intercom Kit
- 05 Hybrid Kit
- 06 4-Wire Kit



# HiLook Intercom Kit


Video Quality	2 MP, H: 129°, V: 75°
Screen Size	7" touch screen
Door Station Protection Level	IP65
Mobile App Control	YES
Capacity	Indoor station: 1 + 16 (max.) Door station: 1 + 16 (max.)
Accessory	Rain Cover: DS-KABV6133-RS

Video Quality	2 MP, H: 140°, V: 85°
Screen Size	7" touch screen
Door Station Protection Level	IP65
Mobile App Control	YES
Capacity	1 to 1
Accessory	/


Video Quality	2 MP, H: 117°, V: 70°
Screen Size	7" touch screen
Door Station Protection Level	IP65, IK08
Mobile App Control	YES
Capacity	Indoor station: 1 + 2 (max.) Door station: 1 + 1 (max.)
Accessory	Angle Bracket: DS-KABV6113-A

Video Quality	720P, H: 130°, V: 70°
Screen Size	7" non-touch screen
Door Station Protection Level	/
Mobile App Control	NO
Capacity	Indoor station: 1 + 2 (max.) Door station: 1 + 1 (max.)
Accessory	Angle Bracket: DS-KABV24-A

## IP Intercom Kit



HA-DS-IP2




HA-IN-IP2

## 2-Wire Intercom Kit



HA-DS-Y2




HS-IN-Y72

## Hybrid Kit



HA-DS-H1



HA-IN-H1

## 4-Wire Kit



HA-DS-A2



HA-IN-A2

# IP Intercom Kit

## HA-KIT-IP2


### What's in the package

Includes one indoor monitor, one door station, 32GB TF card, wall mount bracket and one Australian standard power adapter.


### Features

- Modern look with a slim-bezel indoor monitor and a sturdy metal-framed door station.
- Easy to add up to 16 indoor units.
- Control everything from Hik-Connect app.
- PC free quick setup with easy wizard.

**IP65  
RATING**




HA-DS-IP2



HA-IN-IP2

### Topology

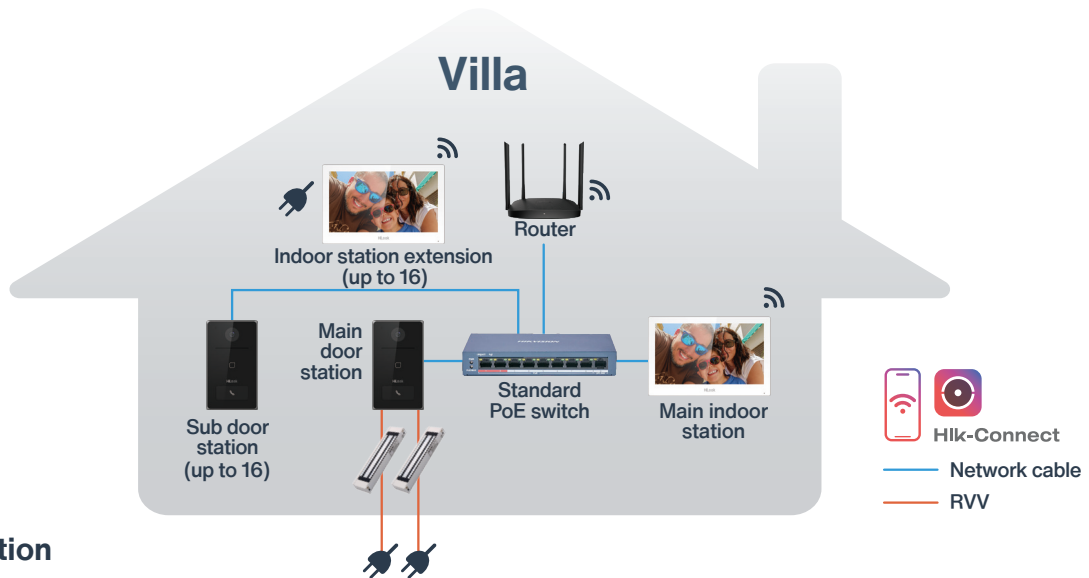

### Specification

HA-DS-IP2		
Camera		2MP HD camera
Night vision		Low illumination IR supplement mode: 2.5m
Backlight compensation		Support
Digital noise reduction		Support
WDR		True WDR
Field of view		Horizontal: 129° Vertical: 75°
Motion detection		Support
Network protocol		TCP/IP, SIP, RSTP
Wi-Fi		2.4GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
Door station/Device interfaces		RS-485 * 1
Lock control		1 relay, Max. 30 VDC 2 A
Dimension		181.6 mm × 103.6 mm × 29.5 mm
Protection level		IP65
Power supply		IEEE802.3af, standard PoE or 12 VDC
HA-IN-IP2		
Display screen		7-inch colorful TFT screen
Display resolution		1024 × 600
Operation method		Capacitive touch screen
Wired network		1 RJ-45, 10/100 Mbps self-adaptive
Wireless network		2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
Power supply		Standard PoE/ 12 VDC

# 2-Wire Intercom Kit

HA-KIT-PY2

## What's in the package

Includes one indoor monitor, one door station, rain cover, wall mount bracket and one Australian standard power adapter.


## Features

- 2-wire video intercom kit for villas or houses.
- Easy Plug-and-Play, one-to-one system.
- Control everything with a single app.
- Durable outdoor station with a high-quality stainless steel panel.

IP65  
RATING




HA-DS-Y2



HS-IN-Y72

## Topology

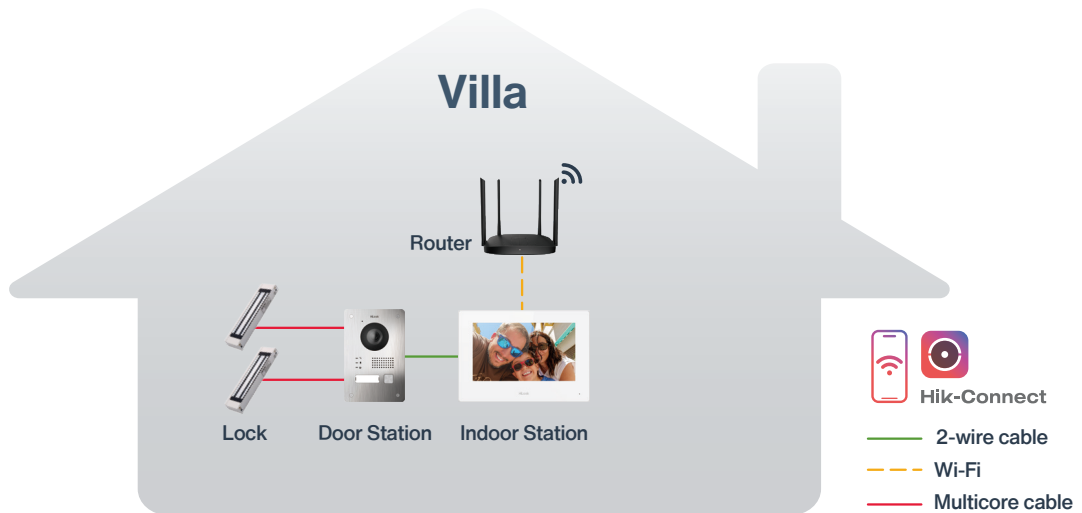

Routing Path	Cable Specification				
	AWG24	AWG20	AWG18	AWG16	Parallel Lines (0.5mm <sup>2</sup> -0.8mm <sup>2</sup> )
Door Station to Indoor Station Transmission Distance	≤ 35m	≤ 60m	≤ 60m	≤ 50m	≤ 35m

## Specification

<b>HA-DS-Y2</b>	Camera	2MP HD camera
	Resolution	Main stream: 1280*720P, 1920*1080p Sub stream: 640*480
	Night vision	Low illumination IR supplement distance: 3 m
	WDR	Support
	Field of view	Horizontal: 140° Vertical: 85°
	Built-in 1*omnidirectional microphone and Built-in 1*loudspeaker, 8Ω	
	Wired network	2-Wire wiring
	Alarm input	2( Exit button or door contact)
	Output	1*12 V/500 mA output
	Protection level	IP65
Power supply	From indoor station	
<b>HS-IN-Y72</b>	Display screen	7-inch TFT touch screen
	Display resolution	1024 × 600
	Network parameters	Wired network 1*10 Mbps through 2-wire interface
		Wireless network: Wi-Fi 802.11 b/g/n, 2.400-2.4835 GHz
	Power input	24VDC/1.5A

# Hybrid Kit

## HA-KIT-H1

### What's in the package


Includes one indoor monitor, one door station, 5-meter 4-wire cable, wall mount bracket and one Australian standard power adapter.

### Features

- A highly budget-friendly, internet-enabled solution.
- Indoor station with daisy-chain connection for simpler wiring.
- Convenient all-in-one app control.




HA-DS-H1

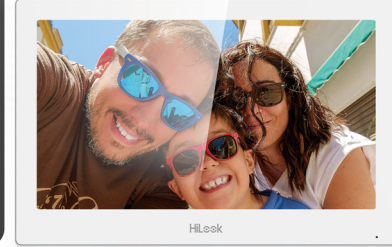


HA-IN-H1

### Topology

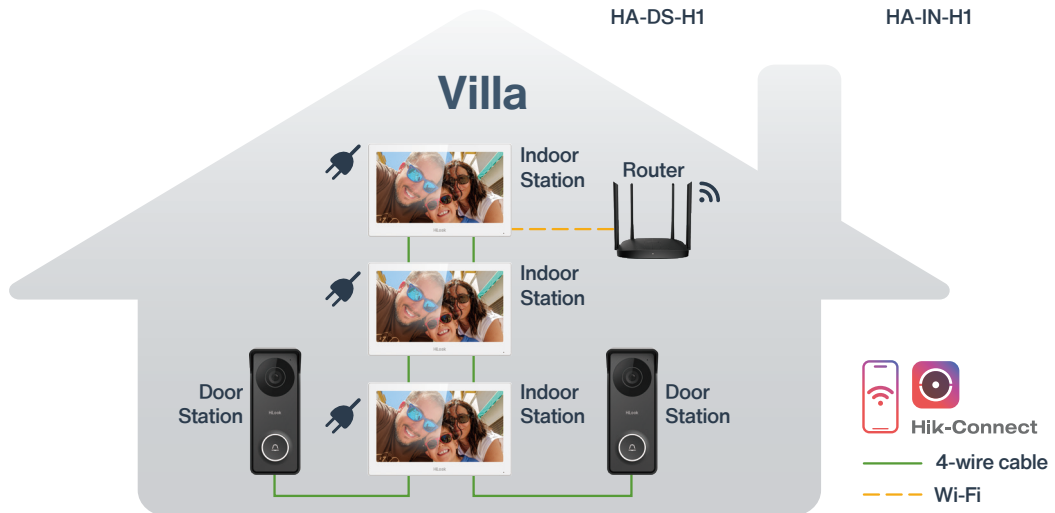

### Wiring suggestion

If you use two groups of parallel cables or twisted pairs instead of the supplied white four-wire cables for wiring, you should put the blue cable (video) and black cable (ground) in the same group of parallel cables or twisted pairs and put the yellow cable (audio) and red cable (power) in the same group.

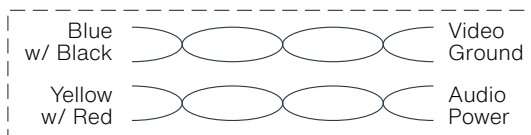

Routing Path	Cable Specification			
	AWG24	AWG20	AWG18	AWG16
Door Station to Indoor Station Transmission Distance	≤ 10m	10m < ≤ 30m	30m < ≤ 50m	50m < ≤ 100m

### Specification

<b>HA-DS-H1</b>	Supplement light	IR light, up to 3 m
	Resolution	Stream resolution:1280 * 720@60fps
	FOV	Horizontal: 117°, Vertical: 70°, Diagonal: 141°
	Lock control	1 relay, max 30 V 1 A
	Power supply input	From indoor station
	Dimension (W × H × D)	55 mm × 145 mm × 24 mm
	Protective level	IP65, IK08
	Material	Aluminum alloy
<b>HA-IN-H1</b>	Type	7 inch Colorful TFT
	Resolution	1024 × 600
	Operating method	Capacitive touch screen
	Wi-Fi	Wi-Fi 802.11 b/g/n
	Power supply input	12 VDC

# 4-Wire Kit

## HA-KIT-A2

### What's in the package

Include one indoor monitor, one door station, 5-meter 4-wire cable, wall mount bracket and one Australian standard power adapter.

### Features

- HD TVI video quality with a wide field of view (96% improvement over traditional solutions).
- Indoor station supports daisy-chain connection for easy wiring.
- Easy plug-and-play setup for the analog system.




HA-DS-A2




HA-IN-A2

### Topology

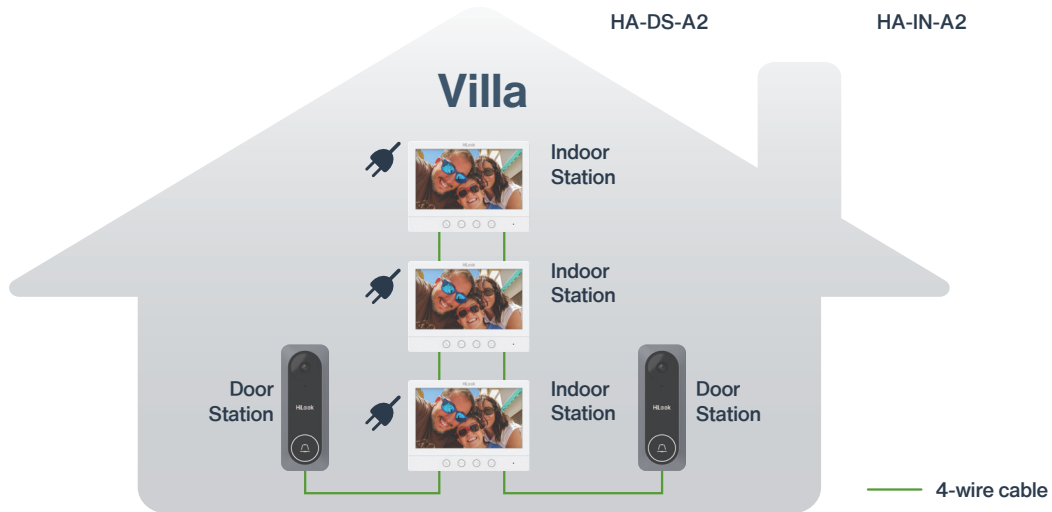

### Wiring suggestion

If you use two groups of parallel cables or twisted pairs instead of the supplied white four-wire cables for wiring, you should put the blue cable (video) and black cable (ground) in the same group of parallel cables or twisted pairs and put the yellow cable (audio) and red cable (power) in the same group.

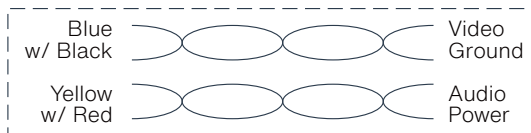

Routing Path	Cable Specification			
	AWG24	AWG20	AWG18	AWG16
Door Station to Indoor Station Transmission Distance	≤ 10m	10m < ≤ 30m	30m < ≤ 50m	50m < ≤ 100m

### Specification

<b>HA-DS-A2</b>	Supplement light	IR light, up to 3 m
	Resolution	Stream resolution: 1280 * 720@60fps
	FOV	Horizontal: 130°, Vertical: 70°
	Built-in omnidirectional microphone and loudspeaker	
	Lock control	1 relay, max 30V 1 A
	Button	1 physical button(s)
	Power supply	From indoor station
	Dimensions	136mm x 51mm x 20mm
Material	Plastic	
<b>HA-IN-A2</b>	Type	7-inch colorful TFT
	Resolution	1024 x 600
	Power supply input	12V DC
	Four-Wire interface	4 in all, 2 for indoor extensions, 2 for doorphones
	Dimensions (W x H x D)	178mm x 132mm x 19mm



**Australia**

Sydney office  
46 Brookhollow Ave, Baulkham Hills, NSW 2153  
Hotline: +61 1300 976 305

