

# STEEL SEISMIC WELDED DISTRIBUTION RACK

## DESCRIPTION

Elevate your infrastructure with DYNAMIX's RDFSS47U, a cutting-edge Two or Four-Post Steel Seismic Welded Distribution Rack designed to meet the evolving demands of modern data centers and networking environments. From seamless single-rack setups in retail and telecom closets to dynamic, high-density configurations in computer rooms and data centers, DYNAMIX delivers a solution that combines unparalleled cable and connectivity expertise with a focus on ease of installation, effortless MACs (Moves, Adds, Changes), and scalable performance.



**2 POST CONFIGURATION**

**4 POST CONFIGURATION**

## FEATURES

- EIA-310-D Compliance:**  
 Adheres to industry standards, ensuring compatibility with a wide range of equipment.
- 19" Mounting:**  
 Designed with the standard 19-inch width for optimal compatibility with networking and IT gear.
- Equipment Mounting Hardware Included:**  
 Streamlined installation process with all necessary hardware included for efficient setup.
- Front and Rear Tapped 4-Post Rack Uprights:**  
 Versatile configuration options for equipment mounting, enhancing flexibility in rack layout.
- Easy Rack Unit Identification:**  
 Accelerate installation with clear and accessible unit identification, minimizing downtime during deployment.
- Grounding Stud Standard:**  
 Ensures a secure and reliable grounding connection for all 4-post racks, prioritizing safety and equipment protection.
- Steel Construction:**  
 Robust and durable steel construction guarantees long-term reliability and stability for your critical infrastructure.
- Seismic Certified**  
 Engineered and certified to withstand seismic events, providing an added layer of protection for your equipment in regions prone to earthquakes.  
 Seismically tested to the latest **Telcordia® GR-63-CORE: Zone 4, Issue 4 standard**
- Welded Construction:**  
 Precision welding ensures a strong and rigid frame, enhancing the rack's overall structural integrity.




**RDF47CM CABLE MANAGEMENT PANELS**


Model Code	W x D x H	Height	Description
RDFSS-47U	530 x 150 x 2293mm	47U	Seismic Welded 2 Post Distribution Frame
RDFSS-AJK			4pc Seismic Adjustable Joining Kit for RDFSS-47 Turns a 2x post to 4x Post Frame 600mm-1050mm
RDF47CM-150	150 x 470 x 2200mm	47RU	Dual 150mm wide finger duct cable management Panels for RDF47U frame. Supplied with side panel.
RDF47CM-300	300 x 470 x 2200mm	47RU	Dual 300mm Wide Finger Duct Cable Management Panels for RDF47U Frame. Supplied with Side Panel.



## 2 POST CONFIGURATION

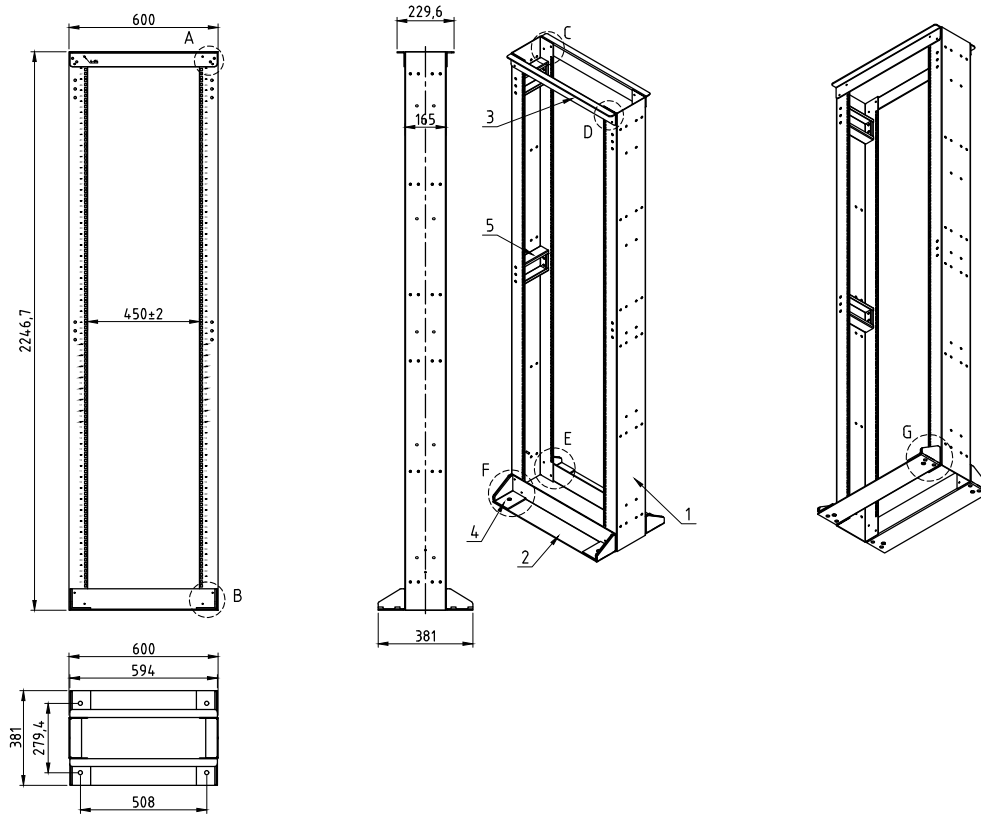

## 4 POST CONFIGURATION

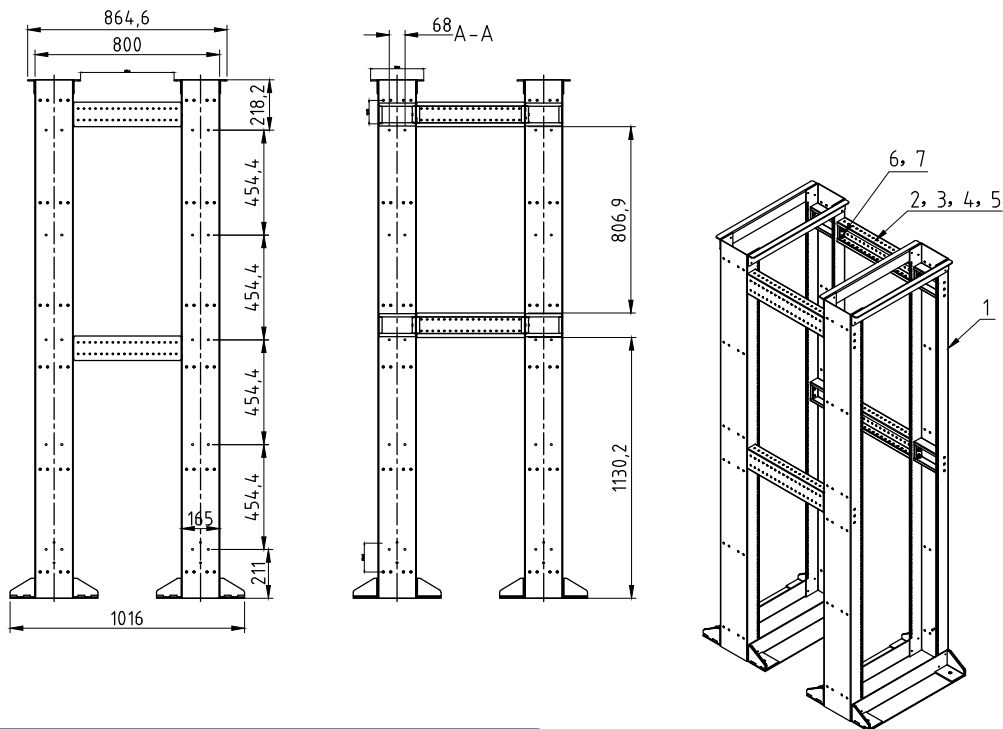

### 4 Post Configuration Includes:

2x RDFSS-47U - 47RU Seismic Distribution Frame

1x RDFSS-AJK - 4pc RDFSS Seismic Adjustable Joining Kit